CUSTOMER ASSISTANCE GUIDE BUILDING PERMIT APPLICATION SUBMITTAL REQUIREMENTS

SINGLE FAMILY DWELLING (OTHER THAN MANUFACTURED OR INDUSTRIALIZED HOUSING)

- Please read all of the following information.
- The following is a check list. You must have a "checkmark" in all the sections listed below prior to submitting your application.

contractor without workers' compensation is constructing the dwelling, the attached form must be completed and notarized. Sewer permit if applicable. Septic permit if applicable. A site plan showing the outside dimensions of the proposed dwelling, including distances in feet to the front, sides and rear property lines.		"Affidavit of Exemption" (See attached form) If you are hiring a contractor to construct your
A site plan showing the outside dimensions of the proposed dwelling, including distances in feet to the front, sides and rear property lines. Three (3) sets of complete construction documents that show in detail code compliance for all of the work proposed to include but not limited to the following information; Home buyer must be given the option to have an automatic fire sprinkler system installed. If buyer chooses not to install sprinklers a detail of the basement floor ceiling assembly must be submitted. (first floor joist size, species and grade of wood) Floor plan showing sizes of all rooms. Footing detail including depth below frost line, thickness, width, and rebar. Type of foundation, showing type of masonry, waterproofing and anchorage of home to foundation. Roof rafter size – species and grade of wood. Rafter spacing (16" on center, 24" on center, etc). Thickness and type of roof sheathing. Ceiling joist size and spacing. Floor joist size and spacing. Wall sections showing top and bottom plates and headers. Location and size of all beams. Sizes of all doors. Window type – including sizes and the net clear opening dimensions of all sleeping room windows (emergency egress). Smoke alarms and carbon monoxide alarms – number and placement. Insulation – U – Values for windows, R – Values for exterior walls, attic and foundation. Heating. Plumbing. Electrical. Stairs (riser height maximum 8 ¼" tread depth minimum 9") Stairs – handrail (height from nose of thread min 34" max 38") Guardrail (34" minimum measured vertically from nose of thread) Width of stairs (36" minimum) Location and size of basement emergency escape opening. Wall bracing detail (material, length and fastening). Completed building permit application.		provide us with a "Certificate of Insurance" showing proof of such. If the homeowner or a contractor without workers' compensation is constructing the dwelling, the attached form
feet to the front, sides and rear property lines. Three (3) sets of complete construction documents that show in detail code compliance for all of the work proposed to include but not limited to the following information; Home buyer must be given the option to have an automatic fire sprinkler system installed. If buyer chooses not to install sprinklers a detail of the basement floor ceiling assembly must be submitted. (first floor joist size, species and grade of wood) Floor plan showing sizes of all rooms. Footing detail including depth below frost line, thickness, width, and rebar. Type of foundation, showing type of masonry, waterproofing and anchorage of home to foundation. Roof rafter size – species and grade of wood. Rafter spacing (16° on center, 24° on center, etc). Thickness and type of roof sheathing. Ceiling joist size and spacing. Wall sections showing top and bottom plates and headers. Location and size of all beams. Sizes of all doors. Window type – including sizes and the net clear opening dimensions of all sleeping room windows (emergency egress). Smoke alarms and carbon monoxide alarms - number and placement. Insulation – U - Values for windows, R – Values for exterior walls, attic and foundation. Heating. Plumbing. Electrical. Stairs (riser height maximum 8 ¾" tread depth minimum 9") Stairs – handrail (height from nose of thread min 34" max 38") Guardrail (34" minimum measured vertically from nose of thread) Width of stairs (36" minimum) Location and size of basement emergency escape opening. Wall bracing detail (material, length and fastening). Completed building permit application.		Sewer permit if applicable Septic permit if applicable.
of the work proposed to include but not limited to the following information; Home buyer must be given the option to have an automatic fire sprinkler system installed. If buyer chooses not to install sprinklers a detail of the basement floor ceiling assembly must be submitted. (first floor joist size, species and grade of wood) Floor plan showing sizes of all rooms. Footing detail including depth below frost line, thickness, width, and rebar. Type of foundation, showing type of masonry, waterproofing and anchorage of home to foundation. Roof rafter size — species and grade of wood. Rafter spacing (16" on center, 24" on center, etc). Thickness and type of roof sheathing. Ceiling joist size and spacing. Floor joist size and spacing. Wall sections showing top and bottom plates and headers. Location and size of all beams. Sizes of all doors. Window type — including sizes and the net clear opening dimensions of all sleeping room windows (emergency egress). Smoke alarms and carbon monoxide alarms - number and placement. Insulation — U - Values for windows, R — Values for exterior walls, attic and foundation. Heating. Plumbing. Electrical. Stairs (riser height maximum 8 ¾" tread depth minimum 9") Stairs — handrail (height from nose of thread min 34" max 38") Guardrail (34" minimum measured vertically from nose of thread) Width of stairs (36" minimum) Location and size of basement emergency escape opening. Wall bracing detail (material, length and fastening). Completed building permit application.		A site plan showing the outside dimensions of the proposed dwelling, including distances in feet to the front, sides and rear property lines.
Footing detail including depth below frost line, thickness, width, and rebar. Type of foundation, showing type of masonry, waterproofing and anchorage of home to foundation. Roof rafter size – species and grade of wood. Rafter spacing (16" on center, 24" on center, etc). Thickness and type of roof sheathing. Ceiling joist size and spacing. Floor joist size and spacing. Wall sections showing top and bottom plates and headers. Location and size of all beams. Sizes of all doors. Window type – including sizes and the net clear opening dimensions of all sleeping room windows (emergency egress). Smoke alarms and carbon monoxide alarms - number and placement. Insulation – U - Values for windows, R – Values for exterior walls, attic and foundation. Heating. Plumbing. Electrical. Stairs (riser height maximum 8 ¼" tread depth minimum 9") Stairs – handrail (height from nose of thread min 34" max 38") Guardrail (34" minimum measured vertically from nose of thread) Width of stairs (36" minimum) Location and size of basement emergency escape opening. Wall bracing detail (material, length and fastening). Completed building permit application.		Home buyer must be given the option to have an automatic fire sprinkler system installed. If buyer chooses not to install sprinklers a detail of the basement floor ceiling assembly must be submitted. (first floor joist size, species and grade of wood)
Floor joist size and spacing. Wall sections showing top and bottom plates and headers. Location and size of all beams. Sizes of all doors. Window type – including sizes and the net clear opening dimensions of all sleeping room windows (emergency egress). Smoke alarms and carbon monoxide alarms - number and placement. Insulation – U - Values for windows, R – Values for exterior walls, attic and foundation. Heating. Plumbing. Electrical. Stairs (riser height maximum 8 ¼" tread depth minimum 9") Stairs – handrail (height from nose of thread min 34" max 38") Guardrail (34" minimum measured vertically from nose of thread) Width of stairs (36" minimum) Location and size of basement emergency escape opening. Wall bracing detail (material, length and fastening). Completed building permit application.		Footing detail including depth below frost line, thickness, width, and rebar. Type of foundation, showing type of masonry, waterproofing and anchorage of home to foundation. Roof rafter size — species and grade of wood. Rafter spacing (16" on center, 24" on center, etc). Thickness and type of roof sheathing.
windows (emergency egress). Smoke alarms and carbon monoxide alarms - number and placement. Insulation – U - Values for windows, R – Values for exterior walls, attic and foundation. Heating. Plumbing. Electrical. Stairs (riser height maximum 8 ¼" tread depth minimum 9") Stairs – handrail (height from nose of thread min 34" max 38") Guardrail (34" minimum measured vertically from nose of thread) Width of stairs (36" minimum) Location and size of basement emergency escape opening. Wall bracing detail (material, length and fastening). Completed building permit application.		 Floor joist size and spacing. Wall sections showing top and bottom plates and headers. Location and size of all beams. Sizes of all doors.
Plumbing. Electrical. Stairs (riser height maximum 8 ¼" tread depth minimum 9") Stairs – handrail (height from nose of thread min 34" max 38") Guardrail (34" minimum measured vertically from nose of thread) Width of stairs (36" minimum) Location and size of basement emergency escape opening. Wall bracing detail (material, length and fastening). Completed building permit application.		windows (emergency egress). Smoke alarms and carbon monoxide alarms - number and placement. Insulation – U - Values for windows, R – Values for exterior walls, attic and foundation.
 Guardrail (34" minimum measured vertically from nose of thread) Width of stairs (36" minimum) Location and size of basement emergency escape opening. Wall bracing detail (material, length and fastening). Completed building permit application. 		Plumbing. Electrical. Stairs (riser height maximum 8 ¼" tread depth minimum 9")
Completed building permit application.		Guardrail (34" minimum measured vertically from nose of thread) Width of stairs (36" minimum) Location and size of basement emergency escape opening.
	B 4 D L A	Completed building permit application.

MDIA will review plans submitted to determine code compliance. If the minimum submittal requirements are not met, we will ask the applicant to supply additional information. If the minimum requirements are met, the plans will be stamped "approved". A building permit will be issued and the applicant will be notified of the inspection fees and when they can pick-up the permit at the Municipal Building. All fees shall be paid prior to the issuance of the permit. Then use the inspection procedures provided to have all the required inspections performed.

INSPECTION PROCEDURES SINGLE FAMILY DWELLING

- Building permit must be posted on the site of the work and clearly visible from the road until completion of the project.
- Your approved plans must be available at time of the inspection. These are the plans that were submitted with your application and were marked "Approved" by the building inspection agency.
- DO NOT schedule an inspection if the work is not ready!!!!
- When scheduling an inspection, you must supply your permit number to the inspector.

PLEASE GIVE THREE (3) WORKING DAYS ADVANCE NOTICE FOOTING INSPECTION WILL BE GIVEN PRIORITY MIDDLE DEPARTMENT INSPECTION AGENCY, INC.

- 1. Footing inspection To be done after forming and prior to placing of concrete.

 Inspector, Joe Muscatello Phone, 1-800-982-6342
- 2. Foundation inspection French drain and water-proofing prior to backfilling.

 Inspector, Joe Muscatello Phone, 1-800-982-6342
- 3. Plumbing under slab (rough-in) done prior to placing concrete floor. Inspector, Joe Muscatello Phone, 1-800-982-6342
- 4. Framing inspection Done prior to insulating, but after heating, plumbing and wiring are roughed in, and prior to any exterior finishes being applied. Inspector, Joe Muscatello Phone, 1-800-982-6342
- 5. Energy conservation. Inspector, Joe Muscatello Phone, 1-800-982-6342
- 6. Wallboard. Only needed if there is an integral or attached garage. Inspector, Joe Muscatello Phone, 1-800-982-6342
- 7. Final inspection When job is completely finished, prior to occupancy permit and after plumbing, mechanical and electrical.

 Inspector, Joe Muscatello

 Phone, 1-800-982-6342

BEFORE DIGGING CALL 811 – SEE ATTACHED BROCHURE



before you dig. Dial 8-1-1



Gas, Oil, Steam, Petroleum or Gascous Materials, Hazardous Materials Communication, Alarm or Signal Lines, Cables or Conduit and Traffic Loops **TEMPORARY MARKING GUIDELINES** Electric Power Lines, Cables, Conduit and Lighting Cables Temporary Survey Markings Reclaimed Water, Irrigation and Stury Lines Sewers and Drain Lines Proposed Excavation Potable Water ORANGE YELLOW PURPLE WHITE GREEN BLUE PINK 띭


YOUR TELEPHONE NUMBER
YOUR MALING ADDRESS
COUNTY - The name of the county where the work will
take place
MUNICIPALITY - City, Township or Borough where the The following information is needed when you call PA One Call System.

work will take place
THE ADDRESS WHERE THE WORK WILL TAKE PLACE
THE NEAREST INTERSECTING STREET TO THE WORK SITE
THE NAME OF A SECOND INTERSECTION NEAR THE

WORK SITE
WORK SITE
IS THE PROPOSED EXCAVATION AREA (WORK SITE)
IS THE PROPOSED EXCAVATION AREA (WORK SITE)
MARKED IN WHITE – Yes or No
OTHER INFORMATION THAT WOULD HELP THE
LOCATOR FIND THE SITE – Carifying information to
specify the exact location of the dig
THE TYPE OF WORK BEING DONE
WHETHER THE WORK WILL L'AKE PLACE IN: Street,
Stdewark, Public or Private Property
THE EXTENT TO FILE EXCAVATION - The approximate
size of the opening; the length and width or diameter
THE METHOD OF EXCAVATION - How will the earth be

moved
WHO IS THE WORK BEING DONE FOR
PERSON TO CONTACT IF THE UTILITIES HAVE
QUESTIONS
THE CONTACT PERSON'S PHONE NUMBER - The
phone number with area code for daylime contact
THE BEST TIME TO CALL
FAX NUMBER ANDIOR EMAIL ADDRESS - The
responses from the facility owners will be sent to you
SCHEDULED EXCAVATION DATE AND START TIME not less than 3 business days or more than 10 business days.

DURATION OF A JOB - How long will the job take ANY ADDITIONAL REMARKS YOU MAY HAVE You will be given a 10 digit serial number as confirmation of your call and our system will send you the responses from the utilities on the morning of your scheduled excavation date via fax or email

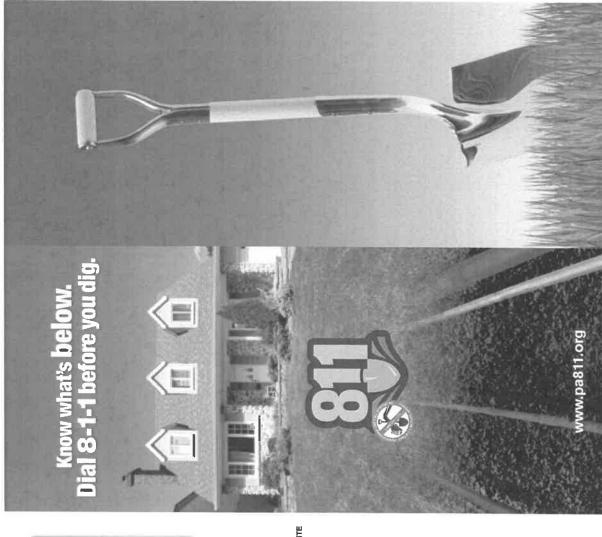

What do we do?

We are the "Call before you dig!" company for all of Pennsylvania. If you plan to disturb the earth with powered equipment, you are required by Pennsylvania law to notify the underground utility companies of your intent to do so. Notification occurs by calling 8-1-1 or 1-800-242-1776, 24 hours of the day, every day of the year. Notification can also be done on our website at www.paonecall.org.

We will then notify the utility companies nearby of your intent to dig. The utility companies are responsible to mark where their underground lines are located with colored flags, paint or chalk.

Please Note:

- PA One Call does not mark
- In some cases, the utility company may not mark the service lines you own.
- if you need your sewer drain cleared be sure to che www.paonecall.org/crossbor for Call Before You Clear information or call 81 I for more information.

Why should you call?

Safe digging is no accident! If you are installing a fence or deck, or digging for a mailbox post, patio or other excavation project, it is important to Know What's Below. Dial 8-1-1 or 1-800-242-1776 before you dig. The utility companies do not want an accident, either. The best way to learn where underground utility lines are located is to call before you dig.

For more information, visit www.pa811.org



Homeowner Quick Tips

- One easy phone call to 8-1-1 three to ten business days before digging begins helps keep your neighborhood safe.
- Call on Monday or Tuesday if you plan to dig on Saturday or Sunday.
- The utility companies will mark where their underground lines are located with colored paint, flags or chalk.
- Do not remove the flags if you see them in your yard.
- Our service is no cost to homeowners.
- Did you hire someone to install your fence, deck or new patio? Ask to see the PA One Call serial number before allowing them to dig on your property.

The Excavator's Responsibility

- Dial 8-1-1 or 1-800-242-1776.
- Do not allow anyone to excavate on your property without calling.
- Always look for the markings on the ground before your dig date.
- If you do not see markings, do not allow anyone to dig. Wait for the lines to be marked by the utility.
- Whoever places the call will receive an email or fax with a list of facility owners who have marked or have not marked. Pay attention to this message.
- Respect the markings by not removing flags or disturbing the actual markings.
- Exercise care around the marked lines by hand digging.
- When the project is complete, the excavator should remove the flags or marks from the ground or pavement.
- Report mishaps by dialing 8-1-1 Report emergencies by dialing 9-1-1.

THIS FORM REQUIRES A NOTARY SEAL

AFFIDAVIT OF EXEMPTION

insurance u	signed affirm that he/she is i under the provisions of Peni asons, as indicated:	not required to provide workers compensation nsylvania's Workers' Compensation Law for one of the	
	perform any work pursua workers' compensation in	ng own work. If property owner does hire contractor to int to building permit, contractor must provide proof of asurance to the municipality. Homeowner assumes appliance with this requirement.	
	Contractor has no employees. Contractor prohibited by law from employing any individual to perform work pursuant to this building permit unless contractor provides proof of insurance to the municipality.		
	Religious exemption under the Workers' Compensation Law. All employees of contractor are exempt from workers' compensation insurance (attach copies of religious exemption letter for all employees).		
Signature of	•		
iviunicipality	y of	Subscribed, sworn to and acknowledged before me by the above this Day of 20	
SEAL			
		Notary Public	